

Heated Towel Rails


Installation Guide

Hard Wired (Hidden Wiring)


Electrician Only



Cable Connection

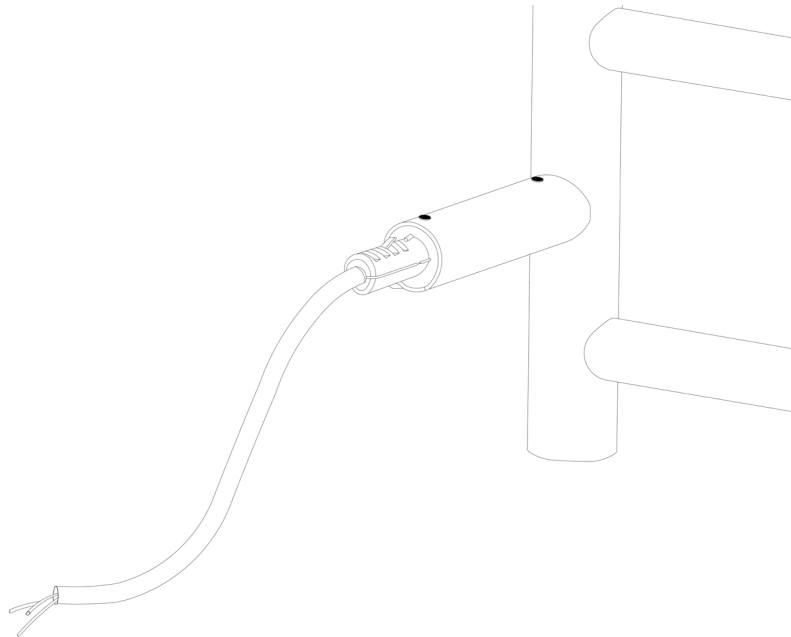

Product Assembled

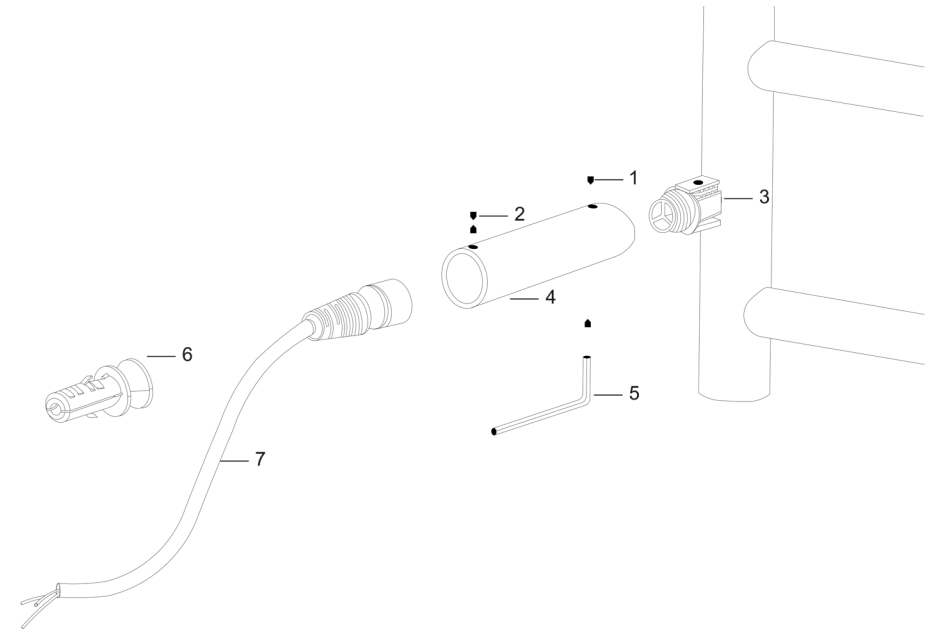

Product Parts

- | | | | |
|----|--------------------------|----|-------------------------------------|
| 1. | 2 x M5*4 Mounting screws | 5. | M2.5 Allen Key |
| 2. | M5*6 Mounting screw | 6. | Plastic push plug |
| 3. | Rail screw connector | 7. | Cable connection (Cut end off plug) |
| 4. | Leg for exposed wiring | | |

Experience, *the difference.*


Hard Wired (Hidden Wiring)

Electrician Only




Step 1.

- Mount 3 x legs using M*16

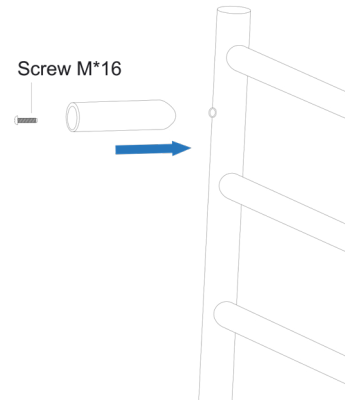


Step 2.

- Feed the cable through centre hole of the plastic push plug
- Screw the cable connection onto the rail screw connector
- Mount the plastic push plug on leg
- Screw M5*6 on underside of leg

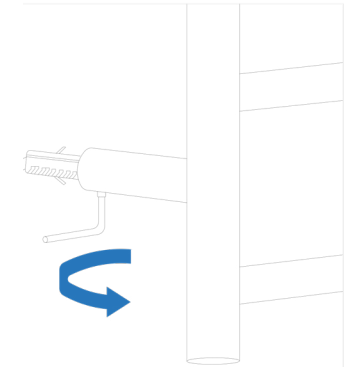


Step 3.

- Mark mounting holes according to dimensions
- Drill 3 x holes to match plastic expanders
- Insert plastic expanders
- Screw 3x fix bases
- Drill 1x 14mm hole to fit the plastic push plug

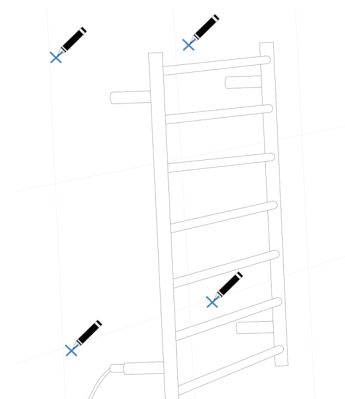

Step 4.

- Feed the wired cable through 1x 14mm hole in wall
- Mount the assembled towel rail by placing 3x legs onto fix bases and pushing the plastic push plug through 14mm hole with wire
- Screw 3x M5*6 on legs for 3x fix bases

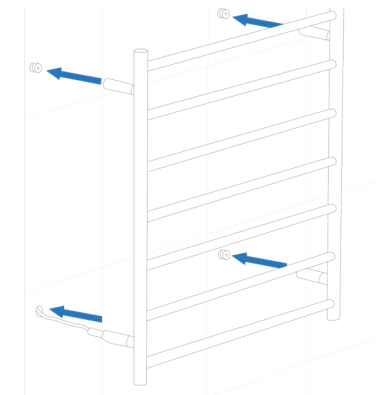


Experience, *the difference.*


Plug In (Exposed Wiring)

DIY

Cable Connection

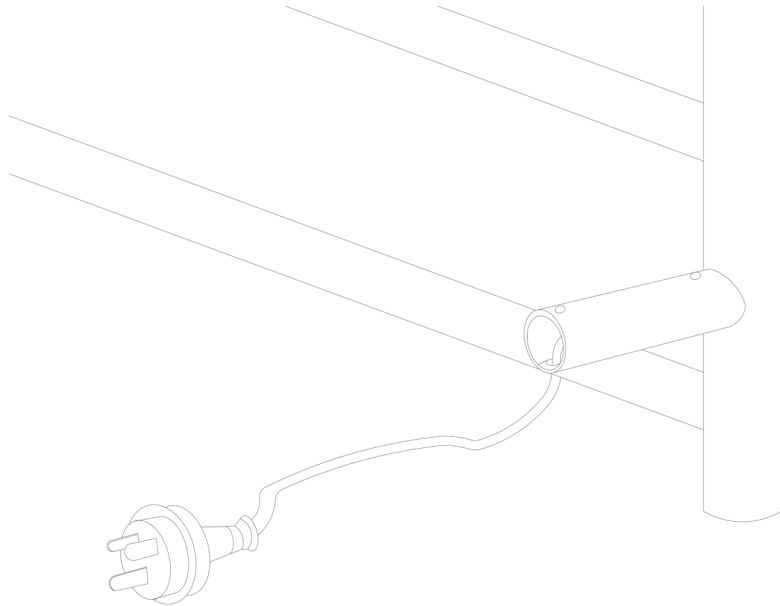

Product Assembled

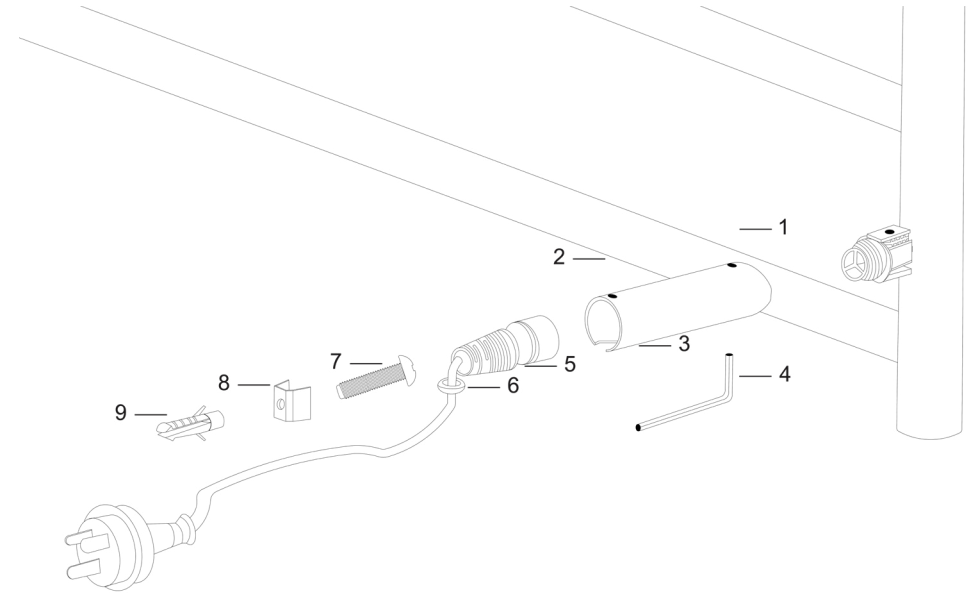

Product Parts

- | | | | |
|----|--------------------------|----|------------------|
| 1. | 2 x M5*4 Mounting screws | 6. | Rubber grommet |
| 2. | M5*6 Mounting screw | 7. | M5*45 Screw nail |
| 3. | Leg for exposed wiring | 8. | Special fix base |
| 4. | M2.5 Allen Key | 9. | Plastic expander |
| 5. | Cable connection | | |

Experience, *the difference.*


Plug In (Exposed Wiring)

DIY




Step 1.

- Mount 4 x legs using M*16

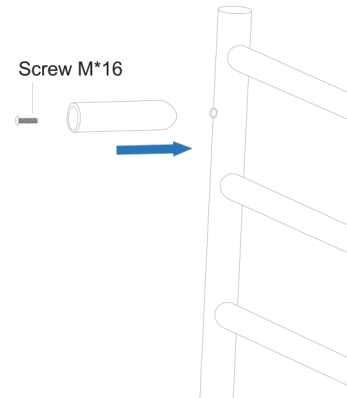


Step 2.

- Mark mounting holes according to dimensions
- Drill 4 x holes to match plastic expanders
- Insert plastic expanders in wall

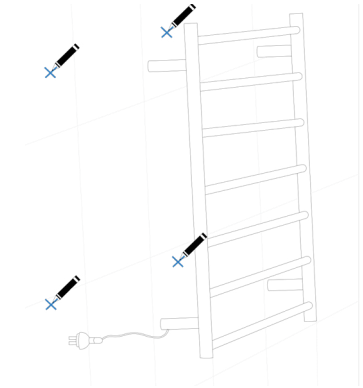


Step 3.

- Mount 3 x fix base and 1 x special fix base

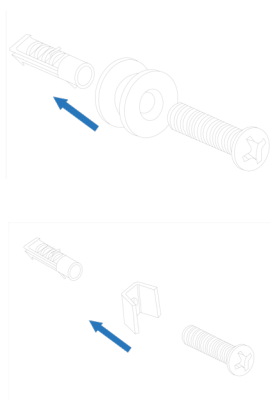


Step 4.

- Mount assembled rail onto 3 x fix bases and 1 x special fix base



Step 5.

- Screw M5*6 on underside of legs and tighten



Experience, *the difference.*



Experience, *the difference.*